

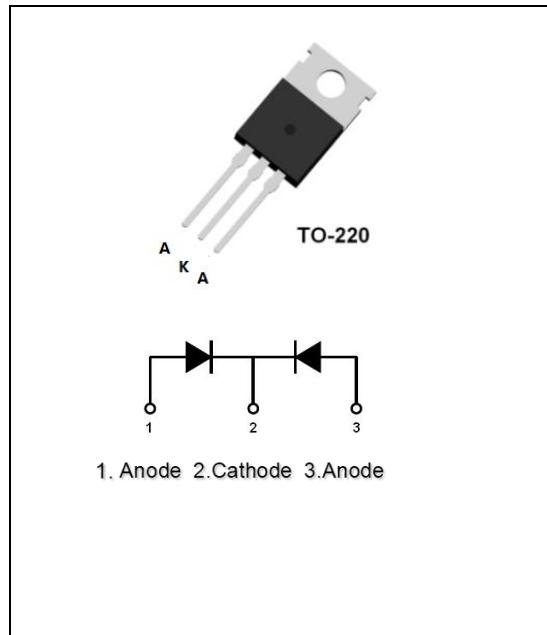
20A, 1200V SiC Schottky Barrier Diode

Description

The AKC20120DNT is a SiC schottky barrier diode. It is base on silicon carbide material, and its switching behavior is independent with temperature. The device has superfast recovery property and lower forward voltage drop, it can be used in switching power supply, solar inverter, PFC and UPS.

Features

- Low Forward Voltage Drop: $V_F=1.55V$ (typical @ $I_F=10A$)
- Reverse Voltage: $V_{RRM}=1200V$
- Avalanche Energy Rated
- High Surge Capability
- Low Power Loss and High Efficiency
- Silicon Carbide Substrate



Applications

- Switching Power Supply
- Solar Inverter
- Power Factor Correction
- Uninterruptible Power Supply

Absolute Maximum Ratings

per diode at $T_C=25^\circ C$ unless otherwise noted

Symbol	Parameter		Ratings	Unit
V_{RRM}	Peak Repetitive Reverse Voltage		1200	V
V_{RWM}	Working Peak Reverse Voltage		1200	V
V_R	DC Blocking Voltage		1200	V
$I_{F(AV)}$	Average Rectified Forward Current	per diode at $T_C=125^\circ C$	10	A
I_{FSM}	Non-repetitive Peak Surge Current	$t_p=10ms$, half sine wave	60	A
		$t_p=200\mu s$, square wave	240	A
P_D	Power Dissipation		160	W
T_J	Operating Junction Temperature Range		-55~+175	°C
T_{STG}	Storage Temperature Range		-55~+175	°C

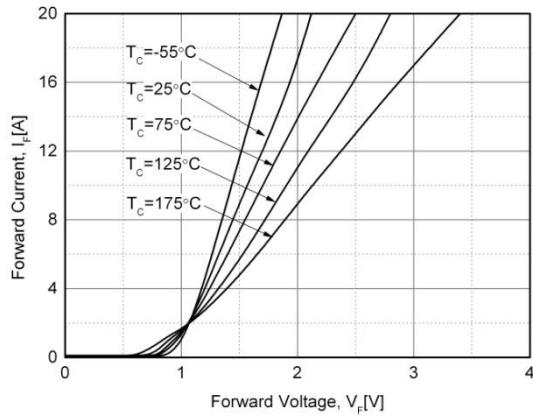
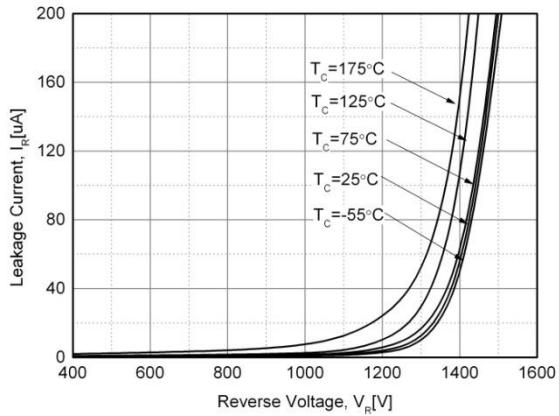
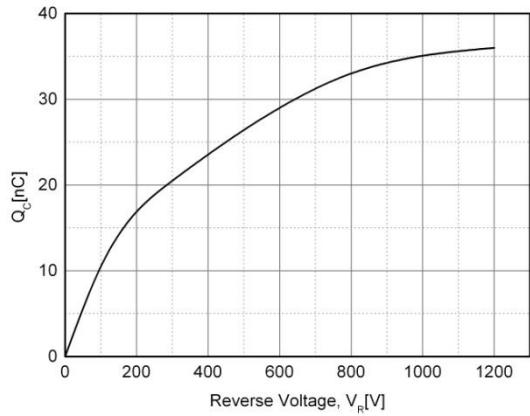
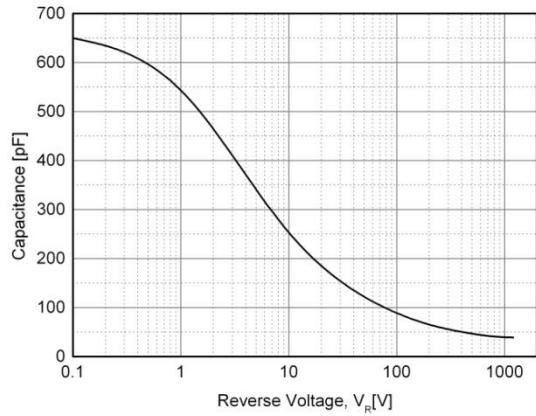
Thermal Characteristics

Symbol	Parameter	Ratings	Unit
$R_{th(J-C)}$	Thermal Resistance, Junction to case	1	°C/W

Electrical Characteristics per diode at $T_c=25\text{ }^\circ\text{C}$ unless otherwise noted

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
V_F	Forward Voltage Drop	$I_F=10\text{A}$	-	1.55	1.80	V
		$I_F=10\text{A}, T_c=125\text{ }^\circ\text{C}$	-	-	2.55	V
I_R	Reverse Leakage Current	$V_R=1200\text{V}$	-	-	200	μA
C	Total Capacitance	$V_R=0\text{V}, f=1\text{MHz}$	-	650	-	pF
		$V_R=400\text{V}, f=1\text{MHz}$	-	49	-	
		$V_R=800\text{V}, f=1\text{MHz}$	-	40	-	
Q_C	Total Capacitive Charge	$V_R=800\text{V}, I_F=10\text{A}, \frac{dI}{dt}=-200\text{A}/\text{us}$	-	33	-	nC

Typical Performance Characteristics

 Fig. 1. Typical Characteristics: V_F vs. I_F

 Fig. 2. Typical Characteristics: V_R vs. I_R

 Fig. 3. Typical Characteristics: V_R vs. Q_C

 Fig. 4. Typical Characteristics: V_R vs. Capacitance


Package Dimensions

TO-220

(Dimensions in Millimeters)

