

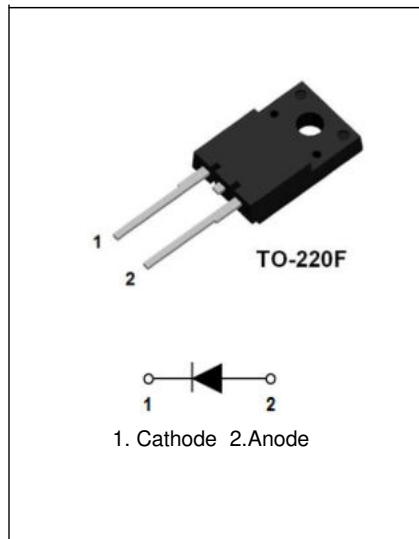
15A, 600V Hyperfast Dual Diode

Description

The AKF1560SF is an hyperfast dual diode with soft recovery characteristics, its typical reverse recovery time is 25ns. This device is designed for freewheeling diode in motor application and diode in power switching supply, and specially suited for use in UPS.

Features

- Ultrafast Soft Recovery: $t_{rr}=25\text{ns}$ (typ.)
- Typical Forward Voltage: $V_F=1.70\text{V}$ (typ.) @ $I_F=15\text{A}$
- Reverse Voltage: $V_{RRM}=600\text{V}$
- TO-220F Isolation Package
- Avalanche Energy Rated



Applications

- Switching Power Supply
- FWD for Motor Application
- Inverter Welding
- UPS

Absolute Maximum Ratings per diode at $T_C=25\text{ }^\circ\text{C}$ unless otherwise noted

Symbol	Parameter		Ratings	Unit
V_{RRM}	Peak Repetitive Reverse Voltage		600	V
V_{RWM}	Working Peak Reverse Voltage		600	V
V_R	DC Blocking Voltage		600	V
$I_{F(AV)}$	Average Rectified Forward Current	per device at $T_C=120\text{ }^\circ\text{C}$	15	A
I_{FSM}	Non-repetitive Peak Surge Current		150	A
T_J	Operating Junction Temperature Range		-65~+150	$^\circ\text{C}$
T_{STG}	Storage Temperature Range		-65~+150	$^\circ\text{C}$

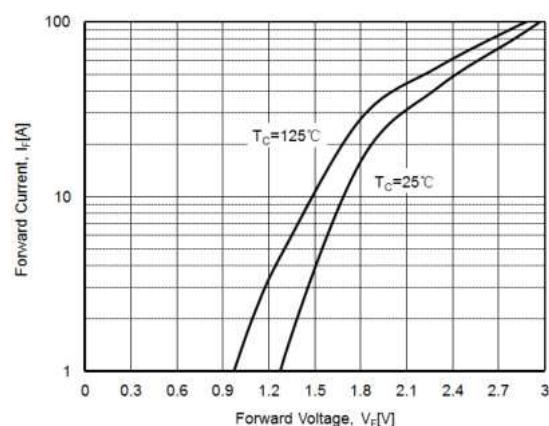
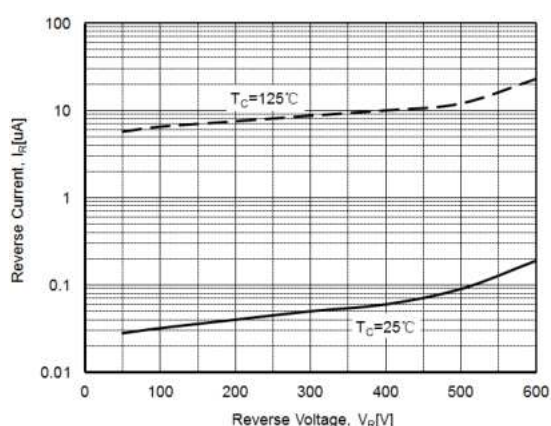
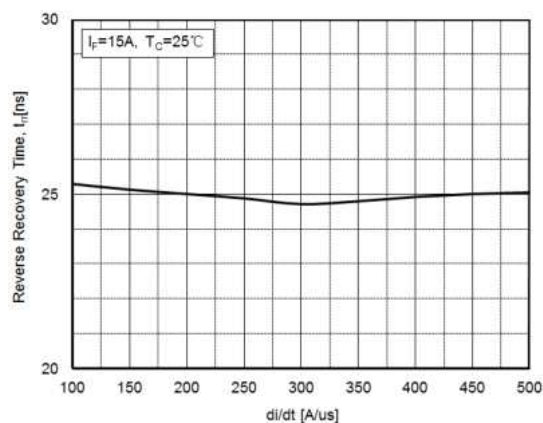
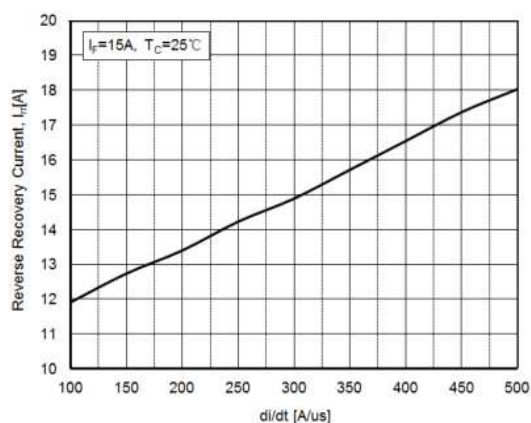
Thermal Characteristics

Symbol	Parameter	Ratings	Unit
$R_{th(J-C)}$	Thermal Resistance, Junction to case	3.0	$^\circ\text{C/W}$

Electrical Characteristics per diode at $T_C=25^\circ\text{C}$ unless otherwise noted

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
V_F	Forward Voltage Drop	$I_F=15\text{A}$	-	1.70	2.10	V
		$I_F=15\text{A}, T_C=125^\circ\text{C}$	-	-	1.70	V
I_R	Reverse Leakage Current	$V_R=600\text{V}$	-	-	10	μA
t_{rr}	Reverse Recovery Time	$I_F=15\text{A}, di/dt=-200\text{A}/\mu\text{s}$	-	25	-	ns
W_{AVL}	Avalanche Energy	$L=30\text{mH}$	20	-	-	mJ

Typical Performance Characteristics

 Fig. 1. Typical Characteristics: I_F vs. V_F

 Fig. 2. Typical Characteristics: I_R vs. V_R

 Fig. 3. Typical Reverse Recovery Time vs. di/dt

 Fig. 4. Typical Reverse Recovery Current vs. di/dt


Package Dimensions

TO-220F

(Dimensions in Millimeters)

