

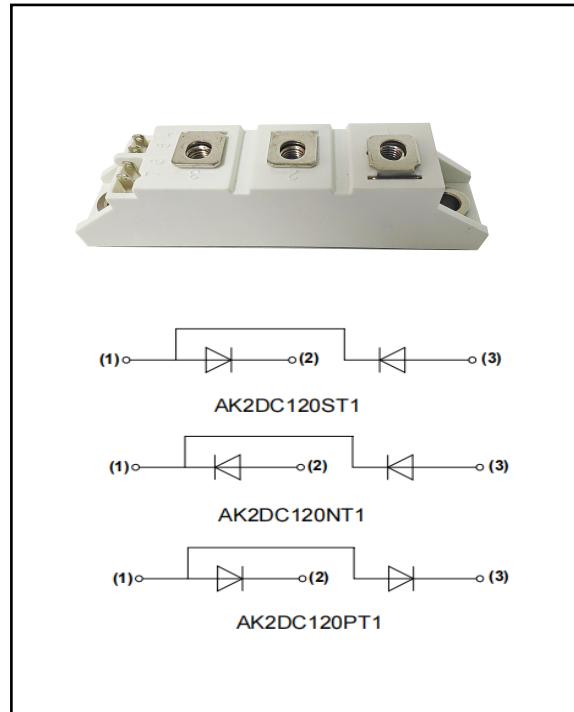
Diode Module

Description

- 1) A package of series of two diodes.
- 2) Heat transfer through alumina ceramic and metal substrate.
- 3) Welding by vacuum welding technology, which provide high reliability.

Typical Application

AC converter, inverter and DC motor.

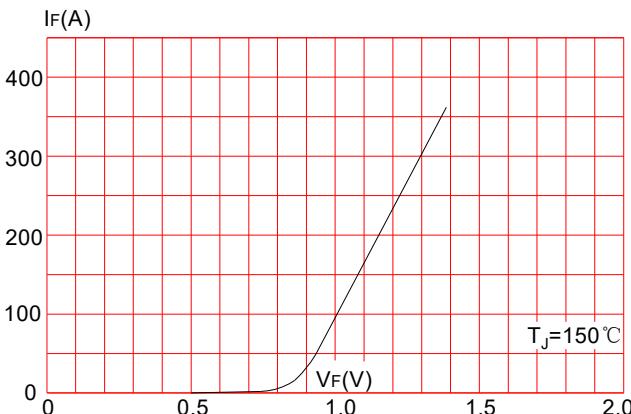
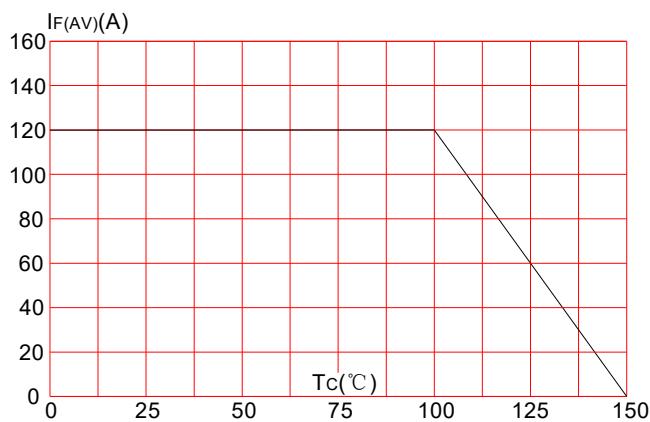
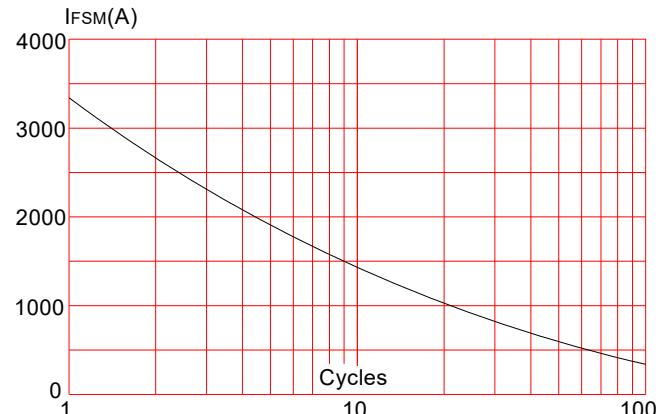
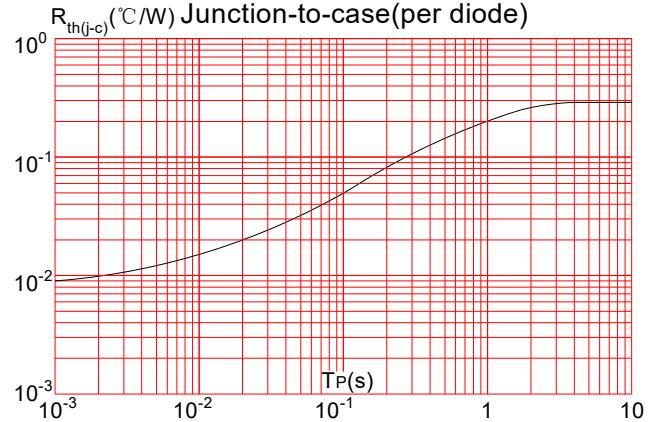


Absolute Maximum Ratings (Packaged into modules, unless otherwise specified, $T_{CASE}=25^{\circ}\text{C}$)

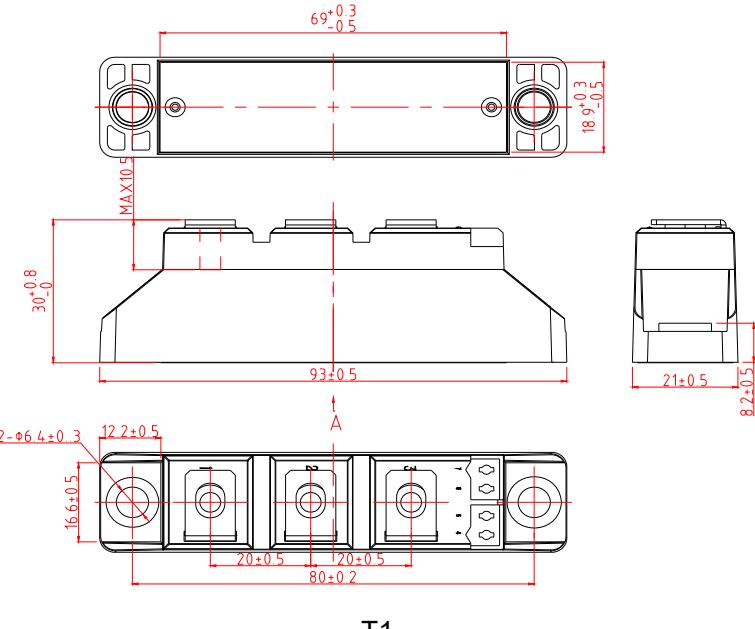



Parameter	Test Conditions	Symbol	Values				Unit
			12	16	18	20	
Operating junction temperature range		T_J	-40-150				°C
Storage temperature range		T_{STG}	-40-125				°C
Repetitive peak reverse voltage	$T_J=25^{\circ}\text{C}$	V_{RRM}	1200	1600	1800	2000	V
Non-repetitive peak reverse voltage	$T_J=25^{\circ}\text{C}$	V_{RSM}	1300	1700	1900	2100	V
Average on-state current	$T_C=100^{\circ}\text{C}$	$I_{F(AV)}$	120				A
Peak on-state surge current	$T_J=25^{\circ}\text{C}$, $t_P=10\text{ms}$, $\sin 180^{\circ}$	I_{FSM}	3360				A
I^2t value for fusing	$\sin 180^{\circ}$	I^2t	56400				A^2s
Insulation voltage		V_{ISO}	3600/3000				V

Electrical Characteristics (Packaged into modules, unless otherwise specified, $T_{CASE}=25^{\circ}\text{C}$)

Parameter	Test Conditions	Symbol	Values	Unit
Peak on-state voltage	$I_F=360\text{A}$ $t_P=380\mu\text{s}$	V_F	≤ 1.6	V
Threshold voltage	$T_J=150^{\circ}\text{C}$	V_{TO}	≤ 0.85	V
Dynamic resistance	$T_J=150^{\circ}\text{C}$	R_d	≤ 1.5	$\text{m}\Omega$
Repetitive peak reverse current	$V_R=V_{RRM}$ $T_J=25^{\circ}\text{C}$ $T_J=150^{\circ}\text{C}$	I_{RRM1} I_{RRM2}	≤ 100 ≤ 40	μA mA
Thermal resistance	Junction to case Case to heatsink	$R_{th(j-c)}$ $R_{th(c-s)}$	0.29 0.12	$^{\circ}\text{C}/\text{W}$

Performance Curves
FIG.1: Forward characteristics(per diode)

FIG.3: Forward current vs. case temperature

FIG.2: Peak on-state surge current

FIG.4: Maximum transient thermal impedance


Mechanical Characteristics

Module size	93mm×21mm
Module height	30mm
Terminal distance of (1) /(2) /(3)	20mm
Mounting torque(M5)	5±15%Nm
Terminal torque(M5)	3±15%Nm
 T1	 AK2DC120ST1  AK2DC120NT1  AK2DC120PT1