

Product Manual

EKWIN ELECTRONICS CO.,LTD

EK BTB24

www.ekwin.net




Standard TRIACS

BTB24 Serial

Main Features:

$I_{T(RMS)}$	V_{DRM}/V_{RRM}	V_{TM}
25A	600V	≤ 1.5 V
	800V	
	1200 V	

Description:

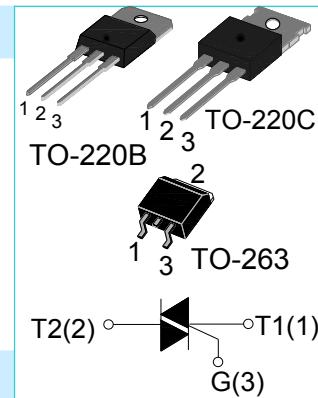

High current density due to double mesa technology; Glass Passivation.BTB24series TRIACS is suitable for general purpose AC switching.they can be used as an ON/OFF Function in applications such as static relays,heating regulation,induction motor stating circuits..or for phase control operation light dimmers,motor speed controllers.

Absolute Ratings(limiting values) :

Symbol	Parameter		Value	Unit
T_{stg}	Storage junction temperature range		- 40 to + 150	°C
T_j	Operating junction temperature range		- 40 to + 125	°C
$I_{T(RMS)}$	RMS on-state current	TO-220BC(Non-Ins) ($TC=90^{\circ}C$)	25	A
		TO-263(Non-Ins) ($TC=100^{\circ}C$)		
I_{TSM}	Non repetitive surge peak on-state current (full cycle, $F=50Hz$)		250	A
V_{DRM}	Repetitive peak off-state voltage($T_j = 25^{\circ}C$)		600/800/1200	V
V_{RRM}	Repetitive peak reverse voltage($T_j = 25^{\circ}C$)		600/800/1200	V
V_{DSM}	Non repetitive surge peak Off-state voltage		$V_{DRM} + 100$	V
V_{RSM}	Non repetitive peak reverse voltage		$V_{RRM} + 100$	V
I^2t	I^2t value for fusing $t_p = 10$ ms		340	A^2s
dI/dt	Critical rate of rise of on-state current ($I_G = 2 \times I_{GT}$)		50	$A/\mu s$

I_{GM}	Peak gate current	4	A
P_{G(AV)}	Average gate power dissipation	1	W
P_{GM}	Peak gate power	10	W

Electrical Characteristics : (T_j=25°C unless otherwise specified)

Symbol	Test Condition	Quadrant	Range	V_{DRM} /V_{RRM}: 600/800V		V_{DRM} /V_{RRM}: 1200		Unit
				B	C	B	C	
I_{GT}	V _D =12V R _L =33Ω	I-II-III	MAX	50	35	50	35	mA
V_{GT}		I-II-III	MAX	1.3		1.5		V
V_{GD}	V _D =V _{DRM} R _L =3.3kΩ T _j =125°C	I-II-III	MIN	0.2				V
I_L	I _G =1.2 I _{GT}	I-III	MAX	80	70	90	70	mA
		II		100	80	100	80	
I_H	I _{TM} = 100mA		MAX	75	50	80	60	mA
dV/dt	V _D =2/3V _{DRM} Gate Open T _j =125°C		MIN	1000	500	1500	1000	V/μs
(dV/dt)c	(dI/dt)c=8.8A/ms T _j =125°C		MIN	22	13	30	20	V/μs

Static Characteristics

Symbol	Parameter		Value(MAX)	Unit
V_{TM}	I _{TM} =35A t _p = 380μs	T _j =25°C	1.5	V
I_{DRM} I_{RRM}	V _D =V _{DRM} , V _R =V _{RRM}	T _j =25°C	5	μ A mA
		T _j =125°C	3	

Thermal Resistances :

Symbol	Parameter	Value	Unit
R_{th(j-c)}	Junction to case for AC	TO-220BC(Non-Ins)	1.2
		TO-263(Non-Ins)	0.85

Fig.1: Maximum power dissipation versus RMS on-state current

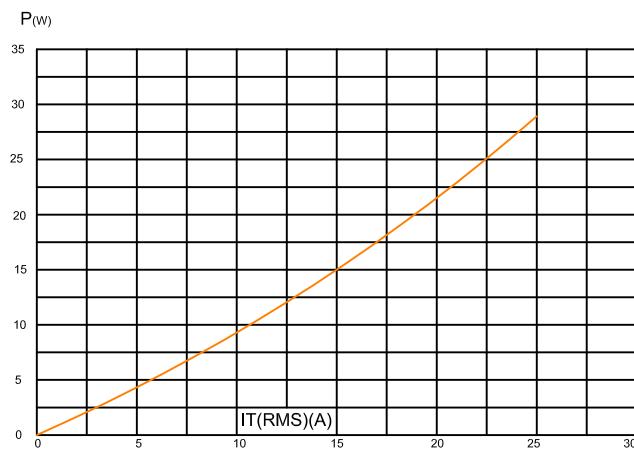


Fig.3 : Surge peak on-state current versus number of cycles

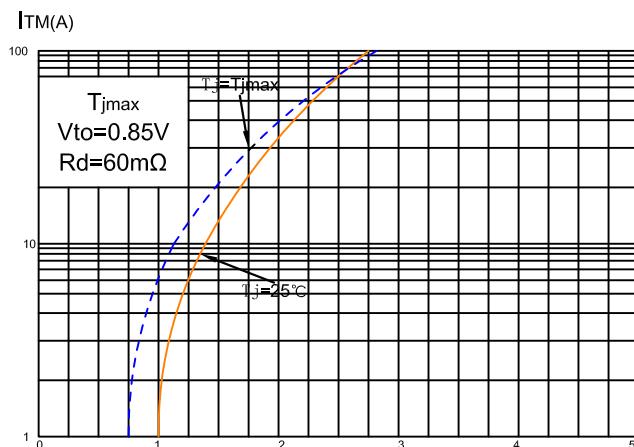


Fig.5 : Non-repetitive surge peak on-state current for a sinusoidal pulse with width $t_p < 10\text{ms}$ and corresponding value of I_t ($dI/dt < 50\text{A}/\mu\text{s}$)

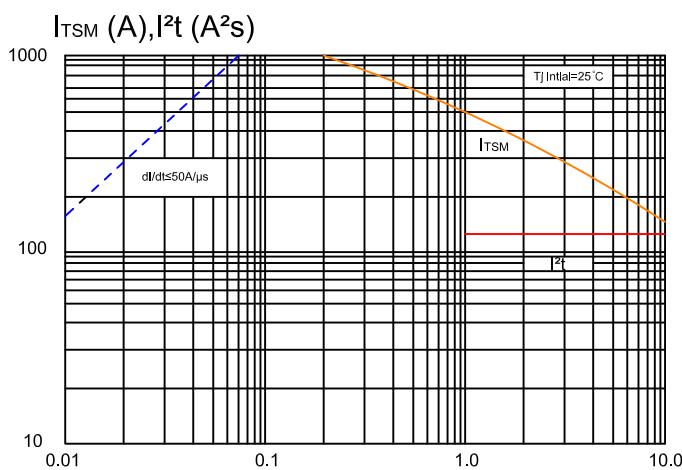


Fig.2 : RMS on-state current versus case temperature

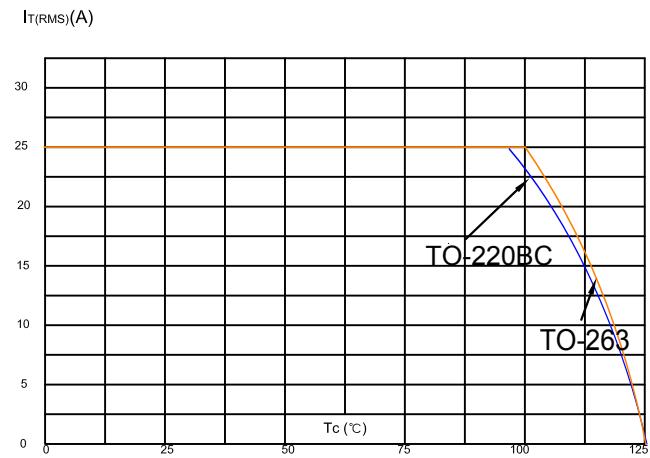


Fig.4 : On-state characteristics (maximum values)


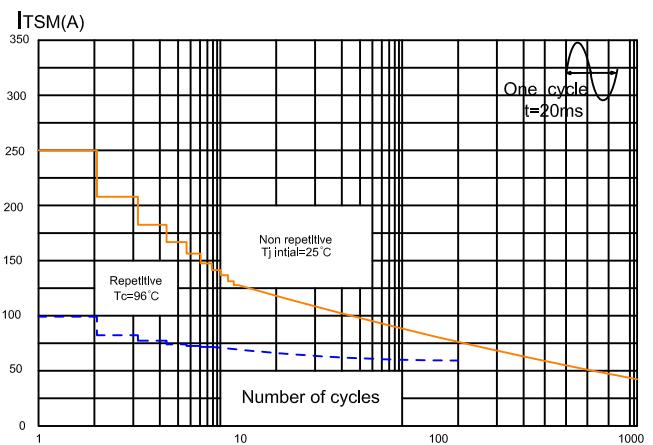



Fig.6: Relative variations of gate trigger current,holding current and latching current versus unction temperature

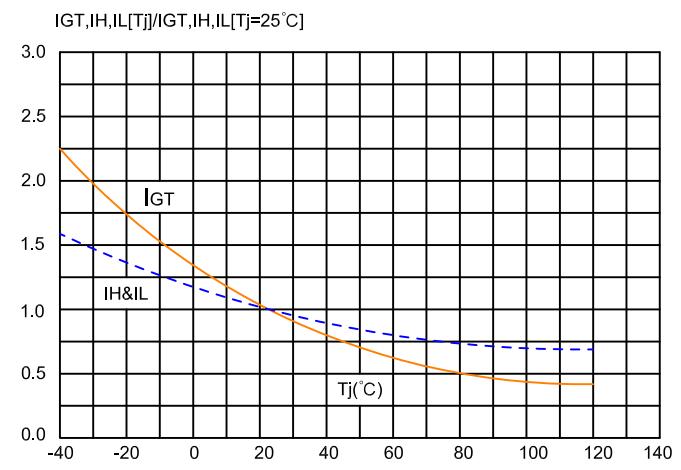


Ordering Information:

BT A 24 - 600 B <small>TRIAC SERIES</small> <small>A:insulated B:non-insulated</small> <small>$I_{T(RMS)}:25A$</small>	<small>IGT Class</small> <small>600:$V_{DRM}/V_{RRM} \geq 600$</small> <small>800:$V_{DRM}/V_{RRM} \geq 800$</small> <small>1200:$V_{DRM}/V_{RRM} \geq 1200$</small>
---	--



Package Mechanical Data :

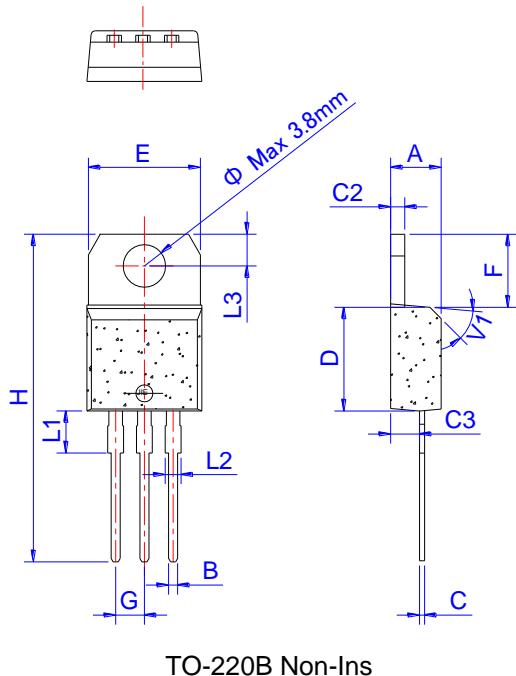

Ref.	Dimensions					
	Millimeters			Inches		
	Min.	Typ.	Max.	Min.	Typ.	Max.
A	4.40		4.60	0.173		0.181
B	0.61		0.88	0.024		0.035
C	0.46		0.70	0.018		0.028
C2	1.21		1.32	0.048		0.052
C3	2.40		2.72	0.094		0.107
D	8.60		9.70	0.339		0.382
E	9.60		10.4	0.378		0.409
F	6.20		6.60	0.244		0.260
G		2.54			0.1	
H	28.0		29.8	1.102		1.173
L1		3.75			0.148	
L2	1.14		1.70	0.045		0.067
L3	2.65		2.95	0.104		0.116
V1		45°			45°	

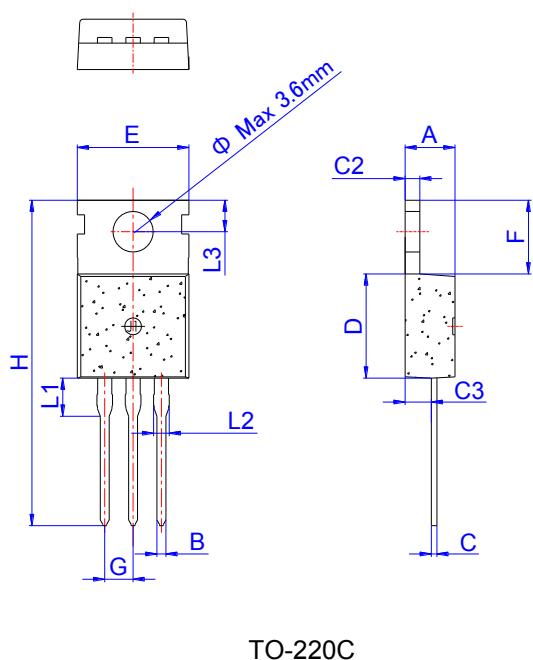

Ref.	Dimensions					
	Millimeters			Inches		
	Min.	Typ.	Max.	Min.	Typ.	Max.
A	4.40		4.60	0.173		0.181
B	0.70		0.90	0.028		0.035
C	0.45		0.60	0.018		0.024
C2	1.23		1.32	0.048		0.052
C3	2.20		2.60	0.087		0.102
D	8.90		9.90	0.350		0.390
E	9.90		10.3	0.390		0.406
F	6.30		6.90	0.248		0.272
G		2.54			0.1	
H	28.0		29.8	1.102		1.173
L1		3.39			0.133	
L2	1.14		1.70	0.045		0.067
L3	2.65		2.95	0.104		0.116
Φ		3.6			0.142	

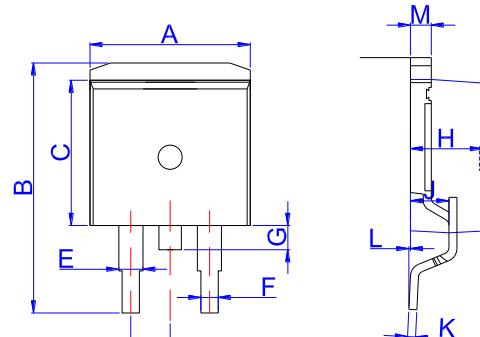

TO-263

Ref.	Dimensions					
	Millimeters			Inches		
	Min.	Typ.	Max.	Min.	Typ.	Max.
A	9.90		10.20	0.390		0.402
B	14.70		15.80	0.579		0.622
C	9.4		9.6	0.37		0.378
D		2.54			0.100	
E	1.20		1.40	0.047		0.055
F	0.75		0.85	0.029		0.033
G			1.75			0.069
H	4.40		4.70	0.173		0.185
J	2.30		2.70	0.091		0.106
K	0.38		0.55	0.015		0.022
L	0	0.10	0.25	0	0.004	0.010
M	1.25		1.35	0.049		0.053